



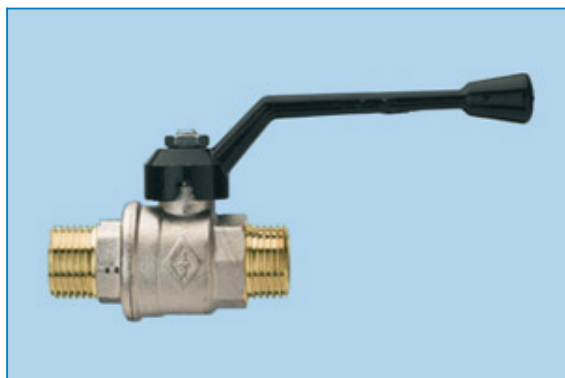

Serie **EXPO-SFER**

Articolo **1803**

Full bore ball valve, M/M threaded, with aluminium handle.

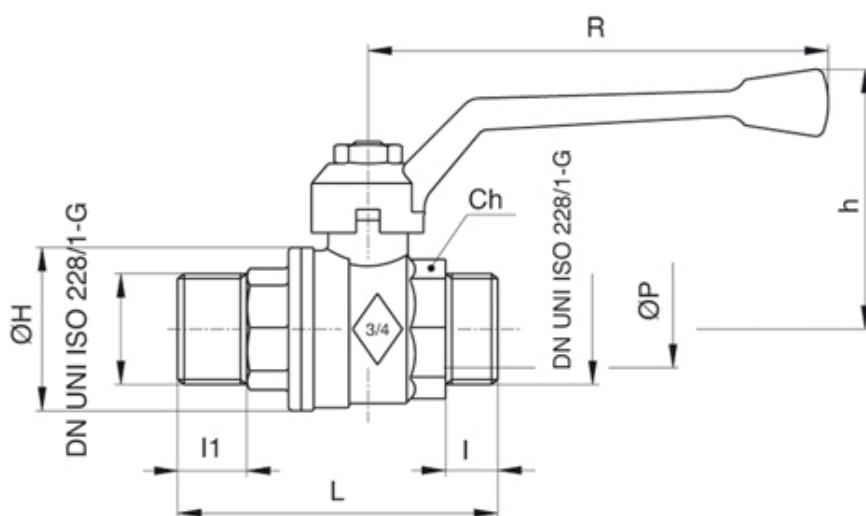

POS.	PART NAME	MATERIALE-MATERIALS MATERIAUX-WERKSTOFF- MATERIAL	N°P
1	BODY	OTTONE CW617N UNI EN 12165	1
2	END CONNECTION	OTTONE CW617N UNI EN 12165	1
3	BALL	OTTONE CW617N UNI EN 12165	1
4	STEM	OTTONE CW614N UNI EN 12164	1
5	PACKING GLAND	OTTONE CW614N UNI EN 12164	1
6	HANDLE	ALLUMINIO EN-AC 46100 EN 1706	1
7	BALL SEAT	P.T.F.E	2
8	STEM SEAL/TRUST WASHER	P.T.F.E	2
9	O-RING	NBR	1
10	DADO	ACCIAIO CL 04	2

MISURA SIZE	DN	BOX	MASTER BOX	CODICE CODE	ØP	I	l1	L	ØH	Ch	R	h	Kv	PN	Kg
1/2"	15	35	70	1803040000	14	11,5	13	66,5	33	25	95	51	16,3	30	0,21
3/4"	20	25	50	1803050000	19	12,5	16,5	76	39	31	110	62	29,5	30	0,33
1"	25	15	30	1803060000	25	15	19	87	49	38	110	66	43	30	0,52
1"1/4	32	10	20	1803070000	32	17,5	21,5	103	59	48	160	80	89	25	0,87
1"1/2	40	6	12	1803080000	38	18	21,5	119	73	54	160	86	230	25	1,41
2"	50	4	8	1803100000	50	22	25,7	142,2	86	67	170	105	265	25	2,01

Limiti di temperatura: -20°C +160°C - Temperature range: -20°C +160°C.



**RUBINETTERIE
BRESCIANE**

