




Serie **EXPO-SFER**

Articolo **1820**

Full bore ball valve, F/F threaded, with aluminium T-handle.

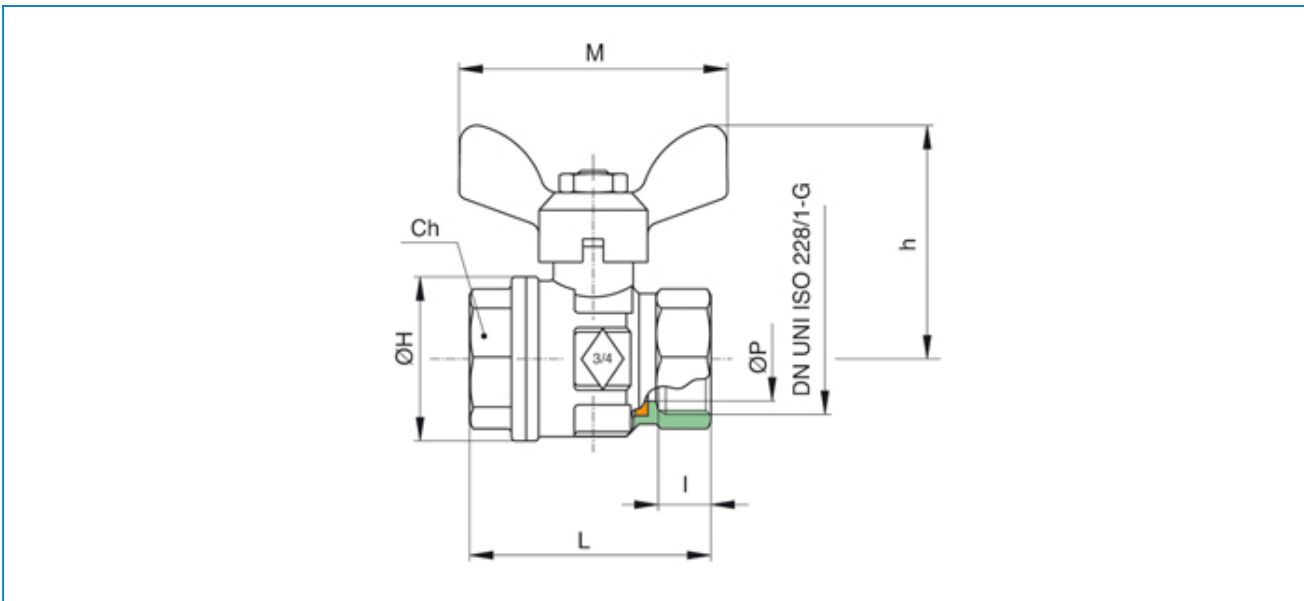

POS.	PART NAME	MATERIALE-MATERIALS MATERIAUX-WERKSTOFF- MATERIAL	N°P
1	BODY	OTTONE CW617N UNI EN 12165	1
2	END CONNECTION	OTTONE CW617N UNI EN 12165	1
3	BALL	OTTONE CW617N UNI EN 12165	1
4	STEM	OTTONE CW614N UNI EN 12164	1
5	PACKING GLAND	OTTONE CW614N UNI EN 12164	1
6	HANDLE	ALLUMINIO EN-AC 46100 EN 1706	1
7	BALL SEAT	P.T.F.E	2
8	STEM SEAL/TRUST WASHER	P.T.F.E	2
9	O-RING	NBR	1
10	DADO	ACCIAIO CL.04	2

MISURA SIZE	DN	BOX	MASTER BOX	CODICE CODE	ØP	I	L	ØH	Ch	M	h	Kv	PN	Kg
1/4"*	8	25	50	1720020000	10	11	51,5	23	20	50	42	5,4	64	0,14
3/8"*	10	25	50	1720030000	10	11,4	51,5	23	20	50	42	6	64	0,12
1/2"	15	50	100	1820040000	15	13,5	55	33	25	50	46	16,3	30	0,18
3/4"	20	30	60	1820050000	20	12,5	57,5	39	31	64	56	29,5	30	0,28
1"	25	20	40	1820060000	25	15	69,5	49	38	64	60	43	30	0,45

Limiti di temperatura: -20°C +160°C - Temperature range: -20°C +160°C.

* Art.1720